


11-16-00

A

Please type a plus sign (+) inside this box **UTILITY  
PATENT APPLICATION  
TRANSMITTAL**

Attorney Docket No. 10806-105 Total Pages 18

First Named Inventor: Ib Mendel-Hartvig

Title: Assay Device and Use Thereof

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Express Mail Label No. EL378851335US

**APPLICATION ELEMENTS**

See MPEP chapter 600 concerning utility patent application contents

Assistant Commissioner for Patents  
**ADDRESSED TO: Box Patent Application**  
Washington, DC 20231

1. ☒ Utility Patent Application Transmittal [Total Pages: 2]
2. ☐ Applicant(s) claim(s) small entity status, 37 C.F.R. 1.27
3. ☒ Specification, Claims and Abstract [Total Pages: 14]
4. ☒ Drawing(s) (35 USC 113) [Total Sheets: 2]
5. Oath or Declaration [Total Pages:   ]
  - a. ☐ Newly executed (original or copy)
  - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 21 completed) [Note Box 6 below]
    - i. ☐ DELETION OF INVENTORS  
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
6. ☐ Incorporation By Reference (useable if Box 5b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 5b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

7. ☐ Microfiche Computer Program (Appendix)
8. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
  - a. ☐ Computer readable copy
  - b. ☐ Paper copy (identical to computer copy)
  - c. ☐ Statement verifying identity of above copies

**Accompanying Application Parts**

9. ☐ Assignment Papers (cover sheet & document(s))
10. ☐ 37 CFR 3.73(b) Statement ☐ Power of attorney (when there is an assignee)
11. ☐ English Translation Document (if applicable)
12. ☐ Information Disclosure Statement (IDS/PTO-1449)
- ☐ Copies of Citations
13. ☒ Preliminary Amendment
14. ☒ Return Receipt Postcard (MPEP 503)
15. ☐ Certified Copy of Priority Document(s)
16. ☒ Other: Claim for Priority Under 35 USC § 119

**17. FEE CALCULATION**

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	28 -20 =	8	x \$18 =	\$ 144.00
	INDEPENDENT CLAIMS (37 CFR 1.16(b))	1 -3 =	0	x \$80 =	\$ --
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			+ \$ _____ =	\$ --
				BASIC FEE (37 CFR 1.16(a))	\$ 710.00
				Total of above Calculations =	\$ 854.00
	Reduction by 50% for filing by small entity (37 CFR 1.27) =				\$ --
	Assignment Recordation Fee =				\$
	<b>TOTAL =</b>				<b>\$ 854.00</b>

18. ☐ Please charge Deposit Account No. 04-1133 in the amount of \$ \_\_\_\_\_.
19. ☒ A check in the amount of \$854.00 is enclosed.
20. ☒ The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 04-1133:
- a. ☒ Fees required under 37 CFR 1.16
  - b. ☒ Fees required under 37 CFR 1.17.
  - c. ☐ Fees required under 37 CFR 1.18.

21. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information:


- ☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_\_/\_\_\_\_\_, filed \_\_\_\_\_.

**22. CORRESPONDENCE ADDRESS**

☒ Customer Number or Bar Code Label **24256** or ☐ Correspondence Address Below

Name	Holly D. Kozlowski				
	Dinsmore & Shohl LLP				
Address	1900 Chemed Center				
	255 East Fifth Street				
City	Cincinnati	State	OH	Zip Code	45202
Country	USA	Telephone	513-977-8568	Fax	513-977-8141

Respectfully submitted,




Holly D. Kozlowski  
Registration No. 30,468  
Attorney for Applicant(s)  
Dinsmore & Shohl LLP  
1900 Chemed Center  
255 E. Fifth Street  
Cincinnati, OH 45202  
(513) 977-8568

**CERTIFICATE OF EXPRESS MAILING**

"Express Mail" mailing label #: EL378851335US

Date of Deposit: November 15, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to: Box Patent Application; Assistant Commissioner for Patents; Washington, DC 20231.



620702.01

Docket No. 10806-105


PATENT

**CERTIFICATE OF MAILING**

"Express Mail" mailing label #: EL378851335US

Date of Deposit: November 15, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to: Box Patent Application; Assistant Commissioner for Patents; Washington, DC 20231.



**IN THE UNITED STATES PATENT & TRADEMARK OFFICE**

Applicant: Ib Mendel-Hartvig et al : Paper No.:  
Serial No.: To be assigned : Group Art Unit:  
Filing Date: November 15, 2000 : Examiner:  
For: **Assay Device and Use Thereof**

**PRELIMINARY AMENDMENT**

BOX Patent Application  
Assistant Commissioner for Patents  
Washington, DC 20231

Dear Sir:

Prior to calculation of the filing fee and first action by the Examiner, please amend the present application as follows:

**In the Claims:**

Please amend claims 1-25 as follows:

1. (Amended) A test device for conducting an assay for the determination of an analyte in a sample, [said] the test device comprising (i) a housing [(1,2)], and within said housing, (ii) a flow matrix [(6)] allowing liquid to be transported by capillary action and having at least one zone with immobilized capturing agent capable of directly or indirectly binding to the analyte, (iii) a liquid container [(13)] for sample liquid, [and] (iv) at least one liquid container [(12)] for liquid other than sample liquid, [characterized in that the device

005117 694260

0051139266

further comprises] and (v) separation means [(5)] between the flow matrix [(6)] and the liquid containers [(12, 13)], wherein said separation means [(5)] are mounted in a movable relationship with the liquid containers [to in] between a first position wherein the separation means are adapted to prevent liquid contact of the flow matrix [(6)] with the liquid containers [(12, 13)], and [in] a second position wherein the separation means are adapted to permit liquid receiving contact of the flow matrix [(6)] with the liquid containers [(12, 13)].

2. (Amended) The test device according to claim 1, [characterized in that] wherein the flow matrix [(6)] is flat and the liquid flow is lateral within said matrix.

3. (Amended) The test device according to claim 1 [or 2, characterized in that] wherein the flow matrix [(6)] is a membrane strip.

4. (Amended) The test device according to claim 2 [or 3, characterized in that said] wherein the liquid containers [(12, 13)] are mounted adjacent to a face of said flow matrix [(6)], and the separation means comprise a flat liquid-tight element [(5)] sandwiched between the liquid containers [(12, 13)] and the flow matrix [(6)].

5. (Amended) The test device according to [any one of claims 2 to 4, characterized in that] claim 4, wherein the liquid-tight element [(5)] is at least partially removable from the housing [(1, 2)].

6. (Amended) The test device according to claim 5, [characterized in that] wherein the liquid-tight element [(5)] is a pull-out element[, e.g. a pull-out sheet or film].

7. (Amended) The test device according to [any one of claims 1 to 6, characterized in that] claim 1, wherein the liquid containers [(12, 13)] are mounted in a movable relationship with the flow matrix [(6)].

8. (Amended) The test device according to [any one of claims 1 to 7, characterized in that said] claim 1, wherein the at least one liquid container for liquid other than sample liquid [comprise] comprises at least one container with flow liquid [(12), such as a buffer solution].

9. (Amended) The test device according to claim 8, [characterized in that] wherein the liquid container or containers for flow liquid are in the form of an absorbent pad or sponge [(12)].

10. (Amended) The test device according to [any one of claims 1 to 9, characterized in that said] claim 1, wherein the at least one liquid container for liquid other than sample liquid [comprise] comprises a container for an analytically detectable reagent.

Claim 11, line 1, replace "characterized in that" with --wherein the--.

12. (Amended) The device according to claim 10 [or 11, characterized in that] wherein the at least one liquid container for flow liquid is provided upstream and/or downstream of said container with analytically detectable reagent.

13. (Amended) The test device according to [any one of claims 1 to 9, characterized in that said] claim 1, wherein the flow matrix [(6)] comprises a zone having

said analytically detectable reagent predeposited in the matrix or in an element [(8)] placed on the matrix.

Claim 14, line 1, replace "characterized in that" with --wherein--.

Claim 15, line 1, replace "characterized in that" with --wherein--.

16. (Amended) The test device according to claim 13, [characterized in that] wherein a first container [(12)] for flow liquid extends both upstream of and at least partially above and along said zone with analytically detectable reagent.

Claim 17, line 1, replace "characterized in that" with --wherein--

18. (Amended) The test device according to claim 16 [or 17, characterized in that] wherein a barrier element [(11)] extends above said zone [(8)] with analytically detectable reagent to prevent direct contact between said first container [(12)] for flow liquid and the zone with analytically detectable reagent, when said separation means [(5)] is in said second position.

19. (Amended) The test device according to [any one of claims 1 to 18, characterized in that said] claim 1, wherein the capturing agent immobilized in the flow matrix [(6)] is a member of a specific binding pair and [that] wherein the other member of the specific binding pair is part of or coupled to a reagent capable of binding the analyte.

Claim 20, line 1, replace "characterized in that" with --wherein the--.

21. (Amended) The test device according to [any one of claims 10 to 20, characterized in that said] claim 10, wherein the analytically detectable reagent is labelled[, such as by a fluorophore or a chromophore].

22. (Amended) A method of performing an assay for determining an analyte in a sample, which method comprises flowing sample and assay liquids through a test device according to claim 1, wherein the sample and assay liquids flow through the flow matrix to reach [a] the [reaction] zone in said flow matrix in a predetermined sequence[, characterized in that a device according to any one of claims 1 to 21 is used to carry out the method].

23. (Amended) [Use of the device according to any one of claims 1 to 21] The method according to claim 22 for testing for an analyte indicating a disease selected from allergy, inflammation and autoimmune diseases.

24. (Amended) [The use according to claim 23,] The method according to claim 23 wherein the analyte is a specific immunoglobulin.

25. (Amended) A kit for conducting an assay method, which kit comprises the test device of [any one of claims 1 to 21] claim 1 in combination with at least one other assay [components] component.

Please add the following claims 26-28:

--26. (NEW) The test device of claim 5, wherein the liquid-tight element comprises a pull-out sheet or a film.--

--27. (NEW) The test device of claim 8, wherein the flow liquid comprises a buffer solution.--

--28. (NEW) The test device of claim 21, wherein the analytically detectable reagent is labelled by a fluorophore or a chromophore.--

**REMARKS**

By the present Amendment, claims 1-25 are amended to omit their multiple dependency and for matters of form in accordance with customary U.S. patent practice. Claims 26-28 are added and include limitations from original claims 6, 8 and 21, respectively. Since these changes do not involve any introduction of new matter, entry is believed to be in order and is respectfully requested.

Respectfully submitted,



Holly D. Kozlowski, Reg. No. 30,468  
Dinsmore & Shohl LLP  
1900 Chemed Center  
255 East Fifth Street  
Cincinnati, Ohio 45202  
(513) 977-8568

621313 01



## ASSAY DEVICE AND USE THEREOF

### Field of the invention

The present invention relates to a novel solid phase assay device for conducting  
5 assays, especially immunochromatographic assays, for the determination of analytes in  
samples, and to methods of using the device.

### Background of the invention

A type of solid phase assay devices comprises a plate-shaped flow matrix of  
10 bibulous material, usually a membrane strip, such as of cellulose nitrate or glass fiber, in  
which liquid can be transported laterally (i.e. in the plane of the strip) by capillary  
forces in the membrane. The membrane usually has a sample application zone, and a  
detection zone downstream of the sample application zone. In the detection zone,  
usually a capturing reagent for the analyte is immobilized. To conduct an assay, the  
15 application zone is contacted with the liquid sample to be assayed for the analyte of  
interest. The device is maintained under conditions sufficient to allow capillary action  
of liquid to transport the analyte of interest, if present in the sample, through the  
membrane strip to the detection zone where the analyte is captured. The capillary liquid  
flow is usually insured by an absorbing pad or the like at the downstream end of the  
20 strip. A detection reagent, usually labelled, is then added upstream of the detection zone  
and interacts with captured analyte in the detection zone, and the amount of captured  
analyte is measured. Often, the detection reagent is pre-deposited in or on the membrane  
strip, e.g. in the form of diffusively movable particles containing fluorophoric or  
chromogenic groups, either upstream of the sample application zone or between the  
25 sample application zone and the detection zone.

EP-A-306 336 discloses an assay device of the general type outlined above,  
wherein the strip of bibulous material is enclosed in a housing. The housing has a first  
opening for introducing the sample into the device, and second opening for introducing  
another liquid reagent than the sample into the device, such as a member of the signal  
30 producing system used. The device can also include additional means than the two  
openings for introducing additional assay reagents into the device, e.g. a third opening  
in the housing or a breakable container with liquid reagent included in the device. The

device is said to permit timed reagent additions even though the operator carries out all the steps in rapid succession.

WO 99/36776 discloses an assay method of the general type described above based on the discovery that zonewise migration of desired assay liquids in a  
 5 predetermined order may be obtained if the liquids are added simultaneously or almost simultaneously to adjacent zones in the strip.

Carrying out an assay with one of the devices described in the two publications mentioned above require, however, a number of steps to be taken by the operator in a short time, and especially the simultaneous addition of liquids according to the method  
 10 of WO 99/36776 may be difficult or inconvenient for the operator to perform.

### Summary of the invention

An object of the present invention is to provide an assay device for conducting an assay for the determination of an analyte, which device permits simultaneous  
 15 initiation of flow of sample and at least one other assay liquid.

Another object of the present invention is to provide an assay device which is suitable for performing a sequential assay with a predetermined flow of sample and assay liquids through the device.

Still another object of the present invention is to provide a device which is easy  
 20 to handle for the operator and requires a minimum of operation steps.

According to the present invention, the above and other objects and advantages are obtained with a test device for conducting an assay for the determination of an analyte in a sample, which device comprises (i) a housing, and within said housing, (ii) a flow matrix allowing liquid to be transported by capillary action and having at least  
 25 one zone with immobilized capturing agent capable of directly or indirectly binding the analyte, (iii) a liquid container for sample liquid, and (iv) at least one liquid container for liquid other than sample liquid. The device is characterized in that it further comprises (v) separation means between the flow matrix and the liquid containers, wherein said separation means are mounted in a movable relationship with the liquid  
 30 containers to in a first position prevent liquid contact of the flow matrix with the liquid containers, and in a second position permit liquid receiving contact of the flow matrix with the liquid containers.

09713763-11500

The flow matrix is preferably plate or sheet shaped, such as a membrane strip, which allows lateral liquid flow therethrough.

The term "liquid container" is to be interpreted broadly and basically encompasses any liquid holding element or means capable of receiving and delivering liquid. Thus, the liquid container may be a receptacle or well with the opening facing the flow matrix, wherein the opening is closed or sealed by the above-mentioned liquid-tight element. The liquid container may also be a body capable absorbing and holding a predetermined amount of aqueous liquid, such as, for example, a pad or a sponge body. Usually, such a body is enclosed in a well or other room sealed by the liquid-tight element.

In one embodiment, the liquid containers are mounted adjacent to a face, usually the top face, of the flow matrix, and the separation means comprise a flat liquid-tight element sandwiched between the liquid containers and the flow matrix. Preferably, this liquid-tight element is at least partially removable from the housing and may, for example, be a pull-out film.

In an alternative embodiment, the liquid containers are mounted in a movable relationship with the flow matrix, i.e. in a first position, the liquid containers are separated from the flow matrix, and may be brought to a second position where the containers are in liquid transferring contact with the flow matrix.

#### **Brief description of the drawings**

Fig. 1 is a perspective view of an embodiment of a device according to the present invention.

Fig. 2 is a top view of the lower part of the device in Fig. 1.

Fig. 3 is a partially transparent bottom view of the upper part of the device in Fig. 1.

Fig. 4 is a sectional side view of the device in Fig. 1.

Fig. 5 is an exploded view corresponding to the side view in Fig. 4.

Fig. 6 is an exploded partial view of another embodiment of device according to the present invention.

### Detailed description of the invention

As best shown in Fig. 1, the device illustrated in Figures 1 to 5 comprises an upper housing part 1 and lower housing part 2 of a material which is inert with respect to the sample and any reagents used in the assays to be conducted with the device, e.g. polystyrene or polypropylene. The upper housing part 1 has a sample well aperture 3 (here conical) and a detection window 4. Also shown in Fig. 1 is a removable separation means 5 to be described below.

With reference now to primarily to Fig. 2, but also to Figs. 3 to 5, the lower housing part 2 has mounted therein a test strip 6 of bibulous material (i.e. a porous material susceptible to traversal of an aqueous medium due to capillary action), e.g. nitrocellulose on a polyester backing. In order to avoid capillary effects along the edges of the strip, the strip 6 is mounted on a ridge (dashed line) in the housing part bottom, the ridge being narrower than the width of the strip. The positioning of the strip 6 in the housing is facilitated by guide means 7. Near the upstream end of the strip 6 (to the left in Fig. 2), a filter piece 8, containing a diffusively movable detection reagent, is placed on the strip. Such a detection reagent may, for example, be a conjugate between a label particle and a reactant capable of binding to the analyte. Further downstream, and placed below and within the detection window 4, there is a reaction zone 9 on the strip which contains an immobilized reactant capable of binding an analyte to be tested for. In the illustrated case, there is also a calibrator zone 10 containing a predetermined amount of immobilized calibrator substance, for example analyte. Also depicted on the membrane strip 6 is a flow barrier 11, here specifically a piece of a film element, which covers the filter piece 8 and extends towards the opening 3 in the housing part 1. The function of the flow barrier 11 will be described further on.

Turning specifically to Figs. 3 to 5, the upper housing part 1 contains at the upstream end of the membrane strip 6, a pad 12 of liquid absorbing material intended to serve as a container for flow liquid, or buffer. The opening 3 in housing part 1 (Fig. 1) is intended for introducing sample to the membrane 6. In the illustrated case, a filter element 13 (which optionally may consist of two or more separate filters), is provided below the opening 3 for assays where the sample liquid needs to be filtered, e.g. when the sample is whole blood and blood cells are to be separated off. The buffer pad 12 thus forms a buffer liquid container, below referred to as buffer pad, and the room

defined by the sample opening 3 and the filter element 13 forms a sample well, or sample container.

At the downstream end of the membrane strip 6, a pad 14 of absorbent material is placed, the purpose of which is to assist in maintaining a capillary flow of assay liquids through the membrane strip 6.

The above-mentioned separation element 5, here a liquid-tight pull-out film, is mounted at the upstream part of the membrane strip 6 to prevent contact between the membrane strip 6 and the bottom parts of the buffer pad 12 and sample filter 13, respectively. The film 5 is arranged to be manually removed by pulling it away from the device to thereby expose the top face of the membrane strip 6 to the buffer pad 12 (except the part of the membrane strip covered by the flow barrier film 11) and the sample filter 13, respectively, such that the membrane strip 6 is brought into simultaneous or close to simultaneous liquid receiving contact with the buffer pad 12 and the filter 13 in the sample well 3. The upper housing part 1 has a recess 15 for the buffer pad 12 designed to press the pad against the pull-out film 5, and thereby against the membrane strip 6 and flow film 11 when the pull-out film 5 is removed. To insure a liquid-tight enclosure of the pad 12 in the recess 15, the pull out film is tightly sealed against the edges of the recess 15, e.g. by welding. While in the illustrated case above, the pull-out film 5 is intended to be removed completely from the device, it is of course, sufficient that the film 5 is withdrawn from the membrane strip 6 to such an extent that the membrane strip surface parts in question are exposed to the sample and buffer liquids, respectively.

An assay for an analyte in a sample may be performed with the device described above as follows.

The device is usually provided ready for use with the buffer pad 12 soaked with buffer solution (flow liquid), with the detection reagent pre-deposited in the filter 8, and with the respective appropriate capture reagents immobilized in the reaction (or detection) zone 9 and the calibration zone 10, respectively. If the analyte to be tested for is, say, an antigen, the detection reagent in the filter 8 may, for example, be an antibody to the antigen coupled to a fluorogen-labelled particle, the immobilized reactant in the reaction zone 9 may be an antibody to the antigen, and the calibrator in the calibration zone 10 may be the analyte or an analyte analogue.

A predetermined amount of sample is added through the opening 3 in the housing part 1. All the necessary assay liquids, i.e. in this case sample liquid and buffer liquid, are then present in the device, the pull-out film 5, however, effectively preventing contact between the respective liquids and the membrane strip 6. The assay is then started by the operator removing the pull-out film 5 to thereby put the membrane strip 6 in simultaneous liquid receiving contact with the buffer pad 12 and the sample liquid in the sample well 3.

Buffer liquid from the pad 12 will now penetrate into the membrane strip 6 via the far upstream end part thereof which is in direct contact with the pad 12 (see Fig. 5) and be transported downstream the membrane strip 6 by capillary force. Simultaneously, sample liquid will penetrate into the membrane strip 6 and be transported in the downstream direction of the strip. There will thus be a flow of sample liquid directly followed by a flow pulse of buffer liquid. However, the detection reagent filter 8 and a major part of the buffer pad 12 are separated from the membrane strip 6 by the flow barrier film 11. Buffer liquid that has been transported into the membrane strip 6 will penetrate into and be transported through the filter 8 and bring the detection reagent deposited therein with it forming a detection reagent pulse. This detection reagent flow pulse will follow in sequence after the sample flow and the buffer flow pulse. Buffer that is transported in the membrane strip 6 after the detection reagent has been removed from the filter 8 will form a second buffer flow pulse following after the detection reagent flow pulse.

The above-mentioned different liquid flows will be transported along the membrane strip 6 in the indicated sequence, i.e. sample flow, first buffer flow, detection reagent flow, and second buffer flow, and will eventually reach the calibrator zone 10 and the reaction zone 9. In the reaction zone 9, analyte present in the sample will be captured by the reagent immobilized in the membrane. The analyte/capture reagent complex formed will be washed by the following first buffer flow, and the analyte-reagent complex will then react with detection reagent contained in the detection reagent flow to form a detectable detection reagent/capture reagent complex. The latter will finally be washed by the second buffer flow. In the calibration zone 10, the predetermined amount of analyte therein will react with the detection reagent in the detection reagent flow to form a detectable detection reagent/analyte complex. The flow liquid from the buffer pad 12 will thus in sequence wash, dissolve detection reagent,

and wash. By measuring, through the detection window formed by the opening 4 in the housing part 1, the signal intensity from the detection reagent captured in the reaction zone 9 and correlating it with that obtained in the calibration zone 10, the amount of analyte in the sample may be determined.

5 As apparent from the above, an assay with the described device is easy and convenient to perform and provides for simultaneous initiation of the different assay liquid flows. Thus, once the sample has been added to the sample well, the pull-out film may be removed. The liquid in the buffer pad and the sample will thereby be brought into contact with the membrane strip and the desired sequential transport of the different  
10 liquid flows will start.

Fig. 6 illustrates a variant embodiment of device according to the present invention. This embodiment differs from that in Figs. 2 to 5 in that (i) the single buffer pad 12 in the embodiment of Figs. 2 to 5 has been replaced by three different buffer pads 12'a, 12'b and 12'c, (ii) the flow barrier film 11 is omitted and the detection reagent  
15 filter, here designated 8', is placed below the central buffer pad 12'b. Also this embodiment will give the same sequence of liquid flows as that in Figs. 2 to 5 once the pull-out film 5 has been removed, i.e. sample flow, first wash flow, detection reagent flow, and second wash flow.

In another variation of device according to the present invention, the buffer pads  
20 12'a and 12'b in Fig. 6 are combined to a single buffer pad, and the detection reagent filter 8' in Fig. 6 (with or without flow barrier film similar to the barrier film 11 in Fig. 5) is placed below the downstream part of the combined buffer pad. Also this embodiment will provide the same sequence of liquid flows upon removal of the pull-out film. The buffer 12'c will wash, and the combined buffer pad 12'a, 12'b will dissolve  
25 detection reagent and then wash.

Still another variation of device according to present invention has the buffer pad arrangement of Fig. 6 with three separate buffer pads 12'a, 12'b and 12'c but the detection reagent filter 8 i Figs. 2-5 is removed and the detection reagent is pre-deposited dissolved in the central buffer pad 12'b. Optionally, one or both of the two  
30 flanking buffer pads 12'a and 12'c may be omitted in this embodiment.

Other buffer pad arrangements as well as other variations and changes of the device which has been described above by way of example only, will be obvious to the skilled person.

In the reaction (or detection) zone described above, a reactant capable of specifically binding the analyte is immobilized (by covalent binding, via physical adsorption, via biospecific affinity, via immobilized particles to which the reactant is covalently bound, etc.). However, instead an agent capable of reacting with the reactant may be immobilized in the membrane, and the reactant may then be added together with the sample, or be pre-deposited in the membrane in an area or zone upstream of the reaction zone. Such an agent may be one member of a specific binding pair (sbp) and the reactant is then coupled or conjugated to the other member of the spb. Exemplary specific binding pairs include immunological binding pairs, such as antigen-antibody and hapten-antibody, biotin-avidin or streptavidin, lectin-sugar, hormone-hormone receptor, nucleic acid duplex. For example, the reaction zone may have streptavidin immobilized therein and the capture reactant for the analyte may be biotinylated.

Similarly, the calibration zone may contain a binder for the calibrator substance rather than the calibrator substance *per se*. The binder is usually a member of a specific binding pair, such as one of those mentioned above, whereas the other member of the specific binding pair is coupled or conjugated to the calibrator substance, which may in turn be added with the sample or pre-deposited upstream of the calibrator zone. Streptavidin, for example, may be immobilized in the calibrator zone while the calibrator substance is biotinylated.

For further details on assay devices of the type contemplated herein, and particularly regarding flow matrixes, sequential assays, calibrator systems and detection reagents, it may be referred to our published international applications WO 99/36776, WO 99/36777 and WO 99/36780, for example.

Analytes to be determined using the present device are readily apparent to the skilled person. Usually, however, the analyte is a biospecific affinity reactant, e.g. an antibody or other protein, hapten, nucleic acid or polynucleotide, such as a DNA sequence. In the latter case the reaction zone may contain streptavidin and the DNA sequence to which the analyte sequence is to hybridize may be biotinylated.

The present device permits convenient pretreatment of the sample before starting the assay.

The present device may also be adapted for performing assays of the type described in our PCT application PCT/SE99/00722 where the flow matrix contains a chromatographic separation zone upstream of the reaction (detection) zone to separate



sample components which would otherwise disturb or influence the determination of the analyte.

While the invention has been described and pointed out with reference to operative embodiments thereof, it will be understood by those skilled in the art that  
5 various changes, modifications, substitutions and omissions can be made without departing from the spirit of the invention. It is intended therefore that the invention embraces those equivalents within the scope of the claims which follow.

## CLAIMS

1. A test device for conducting an assay for the determination of an analyte in a sample, said device comprising (i) a housing (1, 2), and within said housing, (ii)  
5 a flow matrix (6) allowing liquid to be transported by capillary action and having at least one zone with immobilized capturing agent capable of directly or indirectly binding to the analyte, (iii) a liquid container (13) for sample liquid, and (iv) at least one liquid container (12) for liquid other than sample liquid, **characterized in that** the device further comprises (v) separation means (5)  
10 between the flow matrix (6) and the liquid containers (12, 13), wherein said separation means (5) are mounted in a movable relationship with the liquid containers to in a first position prevent liquid contact of the flow matrix (6) with the liquid containers (12, 13), and in a second position permit liquid receiving contact of the flow matrix (6) with the liquid containers (12, 13).  
15
2. The test device according to claim 1, **characterized in that** the flow matrix (6) is flat and the liquid flow is lateral within said matrix.
3. The test device according to claim 1 or 2, **characterized in that** the flow matrix  
20 (6) is a membrane strip.
4. The test device according to claim 2 or 3, **characterized in that** said liquid containers (12, 13) are mounted adjacent to a face of said flow matrix (6), and the separation means comprise a flat liquid-tight element (5) sandwiched  
25 between the liquid containers (12, 13) and the flow matrix (6).
5. The test device according to any one of claims 2 to 4, **characterized in that** the liquid-tight element (5) is at least partially removable from the housing (1, 2).
- 30 6. The test device according to claim 5, **characterized in that** the liquid-tight element (5) is a pull-out element, e.g. a pull-out sheet or film.

7. The test device according to any one of claims 1 to 6, **characterized** in that the liquid containers (12, 13) are mounted in a movable relationship with the flow matrix (6).
- 5 8. The test device according to any one of claims 1 to 7, **characterized** in that said at least one liquid container for liquid other than sample liquid comprise at least one container with flow liquid (12), such as a buffer solution.
9. The test device according to claim 8, **characterized** in that said liquid container  
10 or containers for flow liquid are in the form of an absorbent pad or sponge (12).
10. The test device according to any one of claims 1 to 9, **characterized** in that said at least one liquid container for liquid other than sample liquid comprise a container for an analytically detectable reagent.  
15
11. The test device according to claim 10, **characterized** in that said liquid container for analytically detectable reagent is in the form of an absorbent pad or sponge.
12. The test device according to claim 10 or 11, **characterized** in that at least one liquid container for flow liquid is provided upstream and/or downstream of said container with analytically detectable reagent.  
20
13. The test device according to any one of claims 1 to 9, **characterized** in that said flow matrix (6) comprises a zone having said analytically detectable reagent pre-deposited in the matrix or in an element (8) placed on the matrix.  
25
14. The test device according to claim 13, **characterized** in that a first container for flow liquid is provided above and along said zone with analytically detectable reagent.  
30

15. The test device according to claim 14, **characterized in that** at least one second container for flow liquid is provided upstream of said first container, and/or at least one third container is provided downstream of said first container.
- 5 16. The test device according to claim 13, **characterized in that** a first container (12) for flow liquid extends both upstream of and at least partially above and along said zone with analytically detectable reagent.
- 10 17. The test device according to claim 13, **characterized in that** at least one second container for flow liquid is provided downstream of said first container.
- 15 18. The test device according to claim 16 or 17, **characterized in that** a barrier element (11) extends above said zone (8) with analytically detectable reagent to prevent direct contact between said first container (12) for flow liquid and the zone with analytically detectable reagent, when said separation means (5) is in said second position.
- 20 19. The test device according to any one of claims 1 to 18, **characterized in that** said capturing agent immobilized in the flow matrix (6) is a member of a specific binding pair and that the other member of the specific binding pair is part of or coupled to a reagent capable of binding the analyte.
- 25 20. The test device according to claim 19, **characterized in that** said specific binding pair is antigen-antibody, hapten-antibody, biotin-avidin, biotin-streptavidin or a nucleic acid duplex.
- 30 21. The test device according to any one of claims 10 to 20, **characterized in that** said analytically detectable reagent is labelled, such as by a fluorophore or a chromophore.
22. A method of performing an assay for determining an analyte in a sample, which method comprises flowing sample and assay liquids through a flow matrix to reach a reaction zone in said flow matrix in a predetermined sequence,

characterized in that a device according to any one of claims 1 to 21 is used to carry out the method.

- 5
23. Use of the device according to any one of claims 1 to 21 for testing for an analyte indicating a disease selected from allergy, inflammation and autoimmune diseases.
- 10
24. The use according to claim 23, wherein the analyte is a specific immunoglobulin.
- 15
25. A kit for conducting an assay method, which kit comprises the device of any one of claims 1 to 21 in combination with other assay component(s).

0057169260

## ABSTRACT

A test device and a kit for conducting an assay for the determination of an analyte in a sample comprises (i) a housing (1, 2), and within said housing, (ii) a flow matrix (6) allowing liquid to be transported by capillary action and having at least one zone with immobilized capturing agent capable of directly or indirectly binding to the analyte, (iii) a liquid container (13) for sample liquid, and (iv) at least one liquid container for liquid other than sample liquid. The device further comprises (v) separation means (5) between the flow matrix (6) and the liquid containers (13), wherein said separation means (5) are mounted in a movable relationship with the liquid containers to in a first position prevent liquid contact of the flow matrix (6) with the liquid containers (13), and in a second position permit liquid receiving contact of the flow matrix (6) with the liquid containers (13).

An assay method for determining an analyte in a sample wherein the sample and assay liquids are flown through a flow matrix to reach the reaction zone in a predetermined sequence uses the device for carrying out the method. The use of the device comprises testing for a allergy, inflammation or autoimmune disease.

Fig. 1

1/2

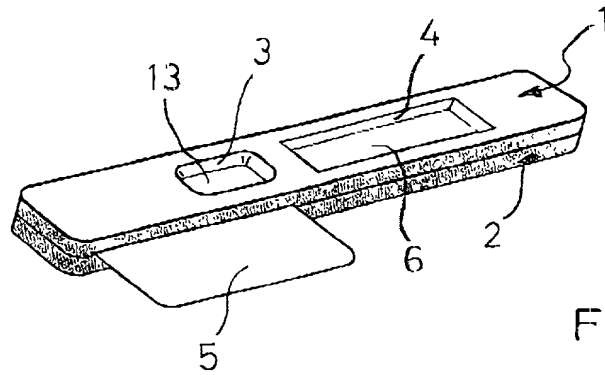


FIG. 1

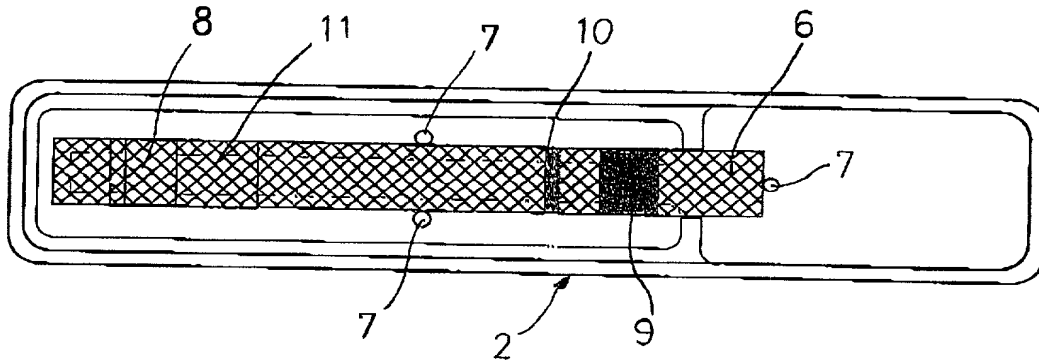


FIG. 2

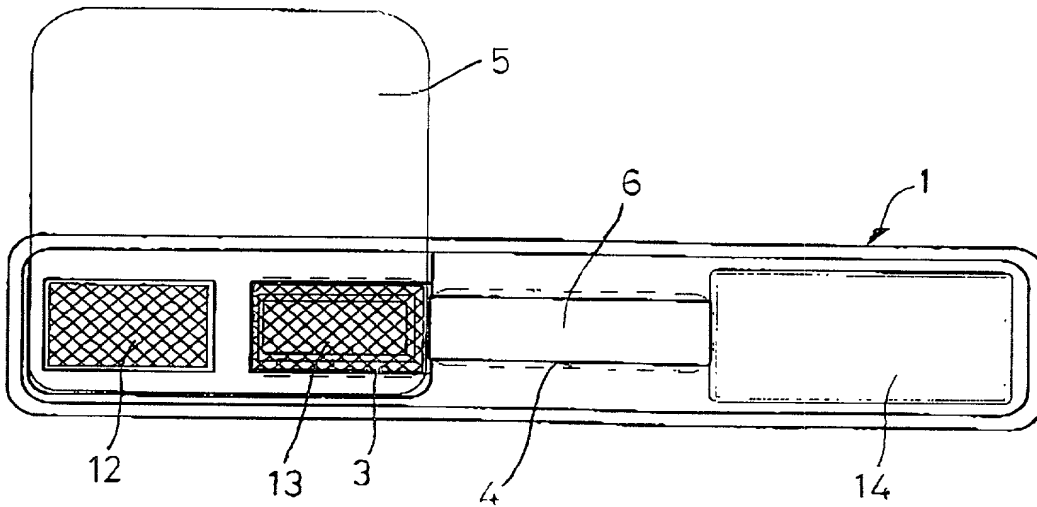


FIG. 3

005111E92E1260

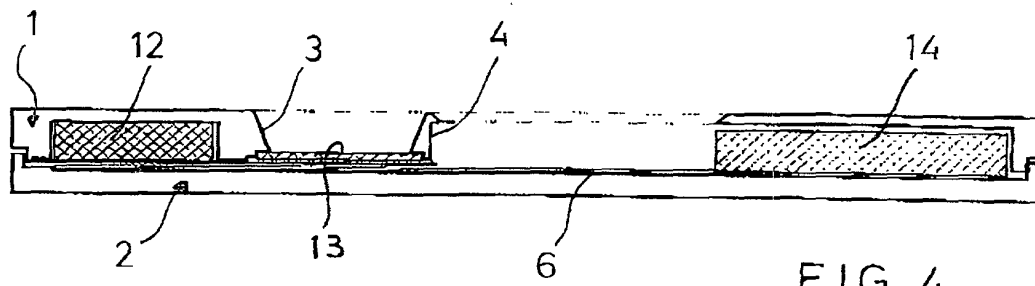


FIG. 4

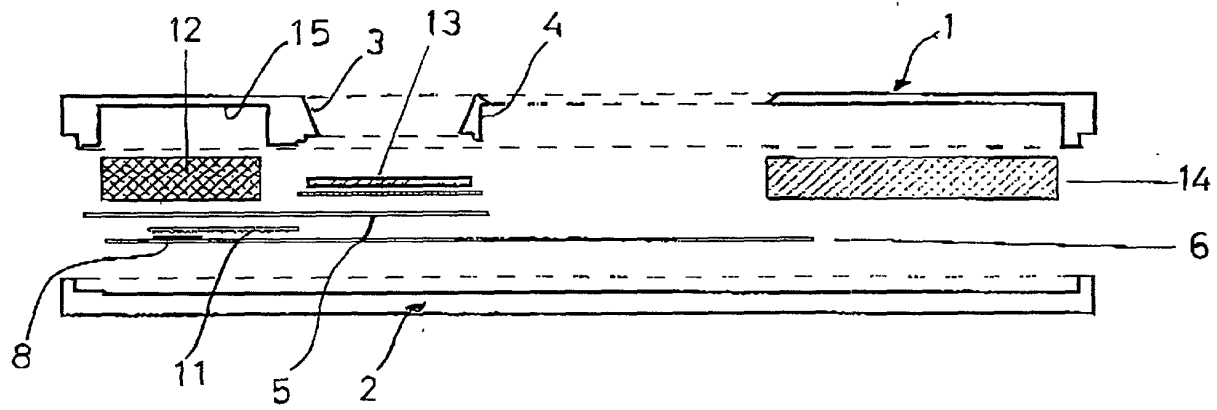


FIG. 5

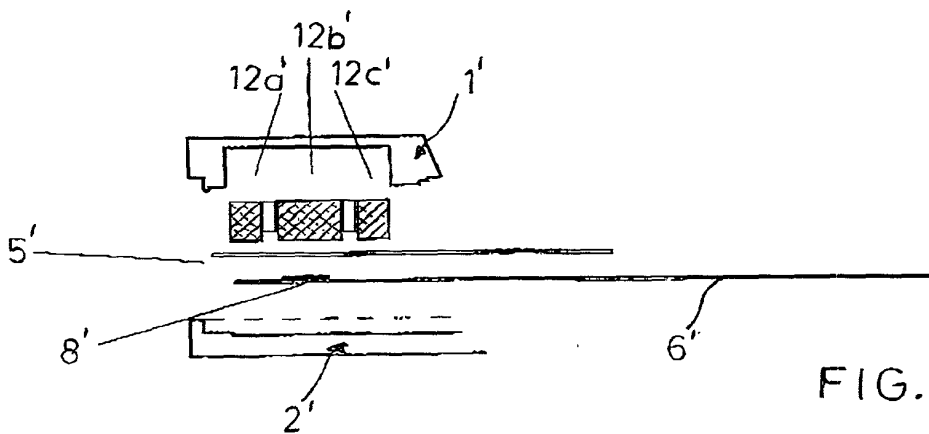


FIG. 6